

Tube Description :

It is 4 foot all-plastic, shatterproof, light-weight LED T8 hybrid tube 15W
 It is a direct replacement for electronic ballasted fluorescent tubes.
 It is ballast compatible, requires no rewiring of the fixture.
 It can wire directly with 100-277V AC line voltage



Tube Feature :

2 options of Installation :

- Option 1. : Direct Wire (work without ballast)
- Option 2. : Plug-and-Play (work with ballast)

Connection : 2-End-Input

Tube Size : 4 foot (48 inch)

Power : 15 watts

Tube housing : Plastic

Lens : Frosted/Clear

Illumination Angle : 310°

Led Driver : Internal

Dimming : non-dimmable

End Caps : G13 bi-pins


Lifespan : 50000 hours

Warranty : 5 Years (10 Year Available)


Certificates : UL, DLC(4.2)

Tube Installation :

1.Direct Wire : directly install LED Tube in a fixture without ballast

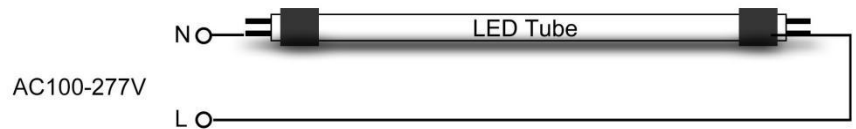

2.Plug-and-Play : directly replace electronic ballasted fluorescent tube in a fixture

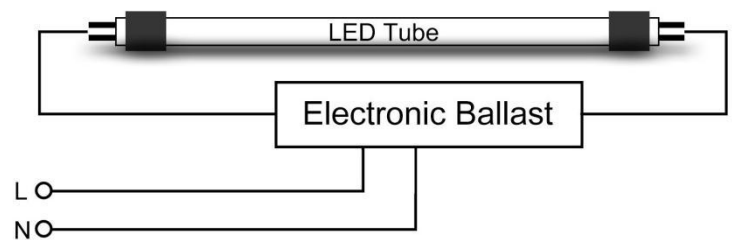

Tube Specification :

| Model | CCT | Size | Watt | Lumen | End Cap | Connection | Input Voltage | PF | CRI |
|-------------------|-------|------|------|-------|---------|------------|-----------------------|------|-----|
| eFS-T8-4FT-15W-ID | 5000K | 4' | 15W | 2100 | G13 | 2 End | AC100-277V or Ballast | ≥0.9 | ≥80 |
| eFS-T8-4FT-15W-ID | 4000K | 4' | 15W | 2100 | G13 | 2 End | AC100-277V or Ballast | ≥0.9 | ≥80 |
| eFS-T8-4FT-15W-ID | 3000K | 4' | 15W | 2100 | G13 | 2 End | AC100-277V or Ballast | ≥0.9 | ≥80 |