



# LED Wall Pack Series


## Main Features

- CREE XTE LED, high luminous efficiency and long life
- MEAN WELL high efficiency LED driver
- Universal voltage AC90-277V, AC347-528V available
- Fins cooling design, better cooling light quality, LED Tj < 85°C
- Excellent optical design, greatly improve the light utilization and evenness.
- Available with Photocell/Sensor
- IP65 rating for outdoor use

## Model Number

LS-WP40W

LS-WP60W

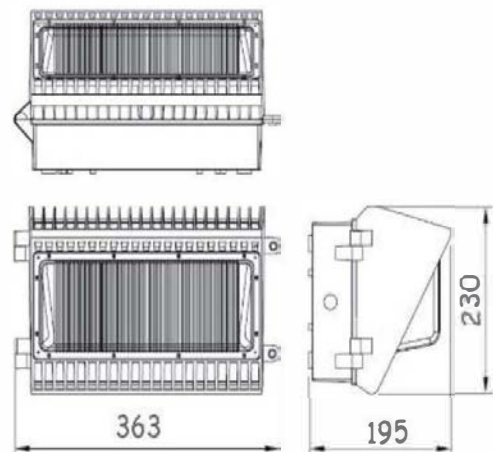



## Luminous Intensity Distribution (C)

UNIT:cd

— V 0.0DEG PLAN  
— H 0.0DEG PLAN

BeamAngle(50%):102.0 Deg

BeamAngle(10%):168.0 Deg

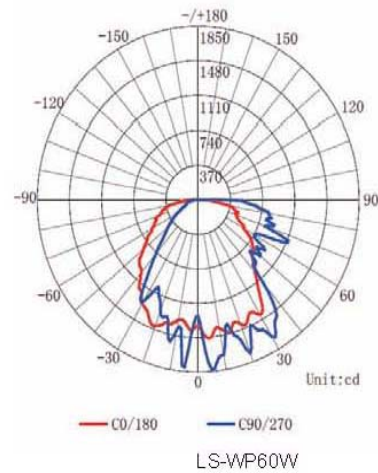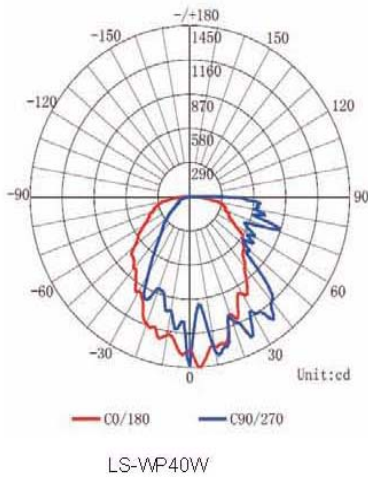

## Main Parameters

Model#	LS-WP40W	LS-WP60W
Power	40W	60W
Output Lumen	3600lm	5400lm
Voltage	90~277VAC (180V-528V available)	
LED/Driver brand	CREE XTE LED / MEAN WELL Driver	
Material	Die-casting aluminum + PC	
CCT	3000K~6500K	
Beam Angel	110X130 D	
PF	>0.9	
CRI	≥75	
IP Grade	IP65	
Working Temperature	-22°F ~140°F / -30°C ~60°C	
Dimension(mm)	14.4*7.72*8.9 in / 366*196*226 mm	
Certificate	ETL DLC CE RoHS	ETL DLC CE RoHS

## Model Number

LS-WP80W

LS-WP100W


## Luminous Intensity Distribution (C)

UNIT:cd


— V 0.0DEG PLAN  
— H 0.0DEG PLAN

BeamAngle(50%):126.0 Deg


BeamAngle(10%):176.0 Deg

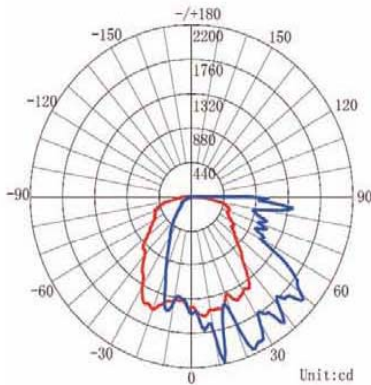

— C0/180 — C90/270  
LS-WP80W

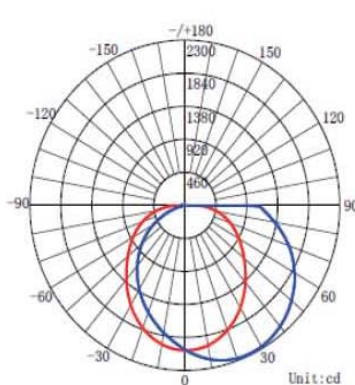

— C0/180 — C90/270  
LS-WP100W

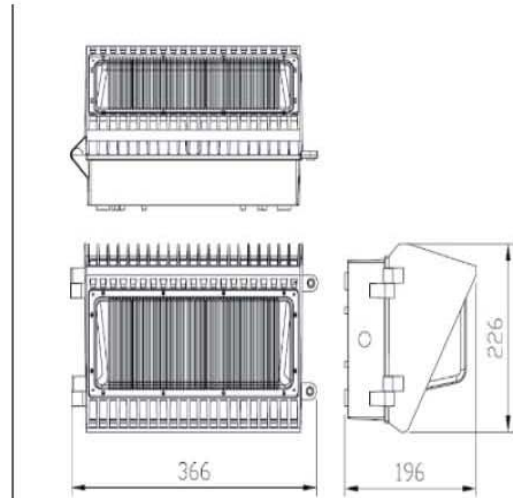

## Main Parameters

Model#	LS-WP80W	LS-WP100W
Power	80W	100W
Output Lumen	7200lm	9000lm
Voltage	90~277VAC (180V-528V available)	
LED/Driver brand	CREE XTE LED / MEAN WELL Driver	
Material	Die-casting aluminum + PC	
CCT	3000K~6500K	
Beam Angel	110X130 D	
PF	>0.9	
CRI	≥75	
IP Grade	IP65	
Working Temperature	-22°F~140°F/-30°C~60°C	
Dimension(mm)	14.4*7.72*8.9 in / 366*196*226 mm	
Certificate	ETL DLC CE RoHS	ETL DLC CE RoHS

## Model Number

LS-WP120W  
LS-WP150W

## Luminous Intensity Distribution (C)


UNIT:cd

— V 0.0DEG PLAN

— H 0.0DEG PLAN


BeamAngle(50%):126.0 Deg

BeamAngle(10%):176.0 Deg

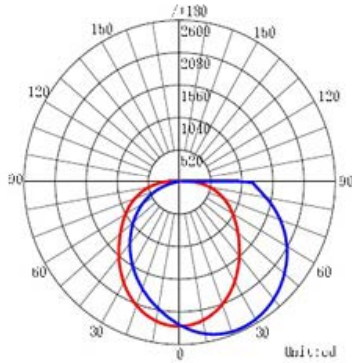




— C0/180 — C90/270

LS-WP120W

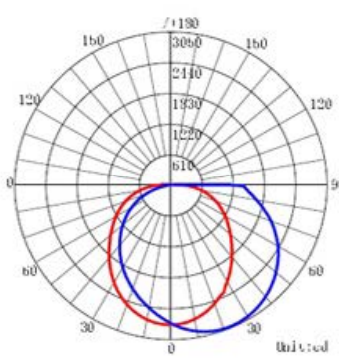

— C0/180 — C90/270

LS-WP150W



## Main Parameters

Model#	LS-WP120W	LS-WP150W
Power	120W	150W
Output Lumen	10800lm	13500lm
Voltage	90~277VAC (180V-528V available)	
LED/Driver brand	CREE XTE LED / MEAN WELL Driver	
Material	Die-casting aluminum + PC	
CCT	3000K~6500K	
Beam Angel	110X130 D	
PF	>0.9	
CRI	≥75	
IP Grade	IP65	
Working Temperature	-22°F~-140°F/-30°C~60°C	
Dimension(mm)	14.4*7.72*8.9 in / 366*196*226 mm	
Certificate	ETL DLC CE RoHS	CE RoHS

## Applications

LED Wall Pack Light series can be widely used as exterior or interior LED lighting for Hotels, Garages, Commercial Buildings, Public areas, Schools and Hospitals ect.

