



# LED T8 DIRECT SERIES

Work without ballast

## Bypass Tube Description :

It is 4 foot aluminum housing LED T8 bypass tube 18W  
 It can wire directly with 100-277V AC line voltage  
 It requires no ballast on the fixture



## Bypass Tube Feature :

Installation: Direct Wire (LED tube work without Ballast)

Connection : One-End-Input or two-end-Input

Tube Size : 4 foot (48 inch)

Power : 18 watts

LED Type : 2835

Tube housing : Aluminum

PC Lens : Frosted/Clear

Illumination Angle : 180°

Led Driver : Internal

Dimming : non-dimmable

End Caps : G13 bi-pins


Lifespan : 50000 hours

Warranty : 5 Years (10 Year Available)


Certificates : UL(E486821), DLC 4.2

## Bypass Tube Installation :

One End Input: directly install LED Tube in a fixture without ballast

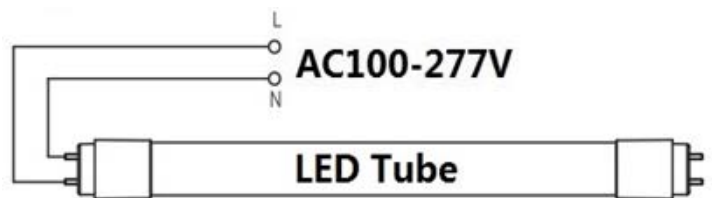

Two-End Input: directly install LED Tube in a fixture without ballast

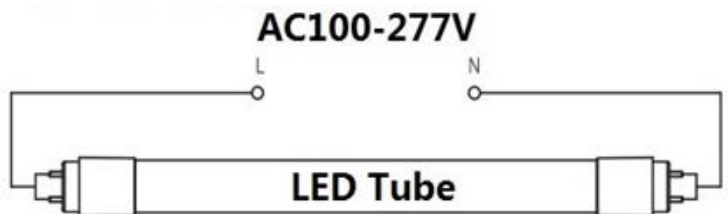

## Bypass Tube Specification :

Model	CCT	Size	Watt	Lumen	End Cap	Connection	Input Voltage	PF	CRI
ORM-T8-4FT-18-ID	5000K	4'	18W	2160	G13	1 End 2 End	AC100-277V	≥0.9	≥80
ORM-T8-4FT-18-ID	4000K	4'	18W	2160	G13	1 End 2 End	AC100-277V	≥0.9	≥80
ORM-T8-4FT-18-ID	3000K	4'	18W	2160	G13	1 End 2 End	AC100-277V	≥0.9	≥80